6 Head Hifi VCR

VR501

HiFi Football Edition

- ***Digital Studio Picture Control*** *- obtain the best possible picture quality regardless of the tape you use.*
- ***Laser-Cut Video Heads*** *have a better profile for a superior head/tape contact. Lesser wear guarantees longer life and higher performance quality.*
- ***Plug & Play*** *- the VCR welcomes you and leads you through the installation steps. You just have to set your language and the country you live in. The VCR does the rest.*
- ***Follow TV*** *sorts the channels in the same order as already found in the TV.*
- ***Direct Record*** *- just insert a cassette, push the record button and the programme you see on TV gets recorded.*
- ***Automatic Satellite Recording***
- ***Automatic Longplay Recording***
- ***NTSC Playback***

SHOWVIEW

DIGITAL STUDIO PICTURE CONTROL

FOLLOW ... TV

16:9 COMPATIBLE

NTSC PLAYBACK

Let's make things better.

PHILIPS

6 Head Hifi VCR

VR501

Product information

Reception
- Tuner: *Full Tuner (UHF + VHF + Hyperband)*
- Tuning: *PLL, CH entry, 99 presets*
- Tuning/Install Features: *Auto Tuning, Manual Store, Plug & Play, welcome screen*
- Time/Date Download: *PDC (Time/Date), Text (Time)*

User Interface
- OSD Menu Languages: *Czech, Danish, Dutch, English, Finnish, French, German, Hungarian, Italian, Norwegian, Polish, Portugese, Russian Cyrillic, Slovak, Spanish, Swedish*
- Special Features: *Auto Standby On/Off, Child Lock, Display On/Off*
- Picture Improvement System: *Digital Studio Picture Control*
- TV Related Functions: *16:9 (pin 8), Direct Record, Follow TV*

Remote Control Unit
- Remote Control - code: *TV-RC5, VCR1-RC5*

Connectors Rear
- EXT1: *Black, Euro CVBS in/out*
- EXT2: *Black, Euro Decoder, RGB loop through*
- Audio Conn. Rear: *Cinch stereo out*
- Terrestrial Antenna In / Out: *75 Ohms (IECtype)*
- Mains Connector: *Standard (IECtype)*

Tape Deck
- Number of Video / FM Audio / Flying Erase Heads: *4 / 2 / 0*
- Play: *+1, -1, Repeat*
- Playback Features: *Perfect Still, Multiple Search Speed, Multiple Slow Motion Speed*
- Index Search Related Functions: *Blank Tape Search, Next/Prev. index search*
- Head Cleaning Mode: *Automatic*
- Tape Counter: *Linear Relative (h.m.s)*
- Wind / Rewind Time (E180): *260sec. / 170 sec.*
- Automatic Functions at Tape End: *Rewind after Play - Eject after Record*

Programming
- Number of Events: *6/month*
- Programming Mode: *OTR, Remote*
- Record Control & Transmitter Identification: *PDC, VPS*
- Programming System: *Daily/Weekly, Showview*
- Automatic SAT. Recording: *SCART 2*
- Record Speed: *Long Play, Standard Play*
- Record Speed Selection: *per Menu*

On Tape Standard
- Add. Pb Standard: *NTSC Playback on PAL TV*

General
- Voltage / Frequency: *198-264 V / 50Hz*
- Backup Presets: *1yr*
- Backup Clock, Calendar, Timer: *3 hrs*
- Power Cons. in Play / Std-By / Low Power Std By: *16 / 4.4 / < 4W*
- Weight incl. / excl. package in kg: *5.5 / 3.6*
- Set Size - W x D x H (mm): *380 x 260 x 93*
- Packaging - W x D x H (mm): *450 x382 x 180*
- Equipment Supplied: *Aerial, Mains cord, Batteries*

Product Highlights

- ***Digital Studio Picture Control***

Digital Studio Picture Control keeps checking the quality of your videotapes and reproduces the best possible picture performance. Philips' Digital Studio Picture Control optimises the playback quality. It measures the characteristics of the tape, adapts the resolution and reduces the picture noise.

- ***Automatic Satellite Recording***

You want to record a programme from your satellite receiver or any other external device when you're not at home, or while you watch another programme at the same time? And you want to set your receiver to come on at a specific time?
Just activate the "RECORD PREPARED MODE", put the set in standby and programme the desired timer on your satellite receiver – and upon activation of the satellite receiver, the set will start the recording simultaneously.

	VR501/02	VR501/16	VR501/58
TV Systems Off Air	PAL B/G	PAL B/G	PAL B/G, PAL D/K, SECAM B/G, SECAM D/K
Sound Systems	German Stereo, Mono	German Stereo, Mono, NICAM	German Stereo, Mono, NICAM
Modulator	Pal G	Pal G	Pal GK (switchable)
Modulator Features	Electr. On/Off switch, Manual Frequency Adjustment	Electr. On/Off switch, Manual Frequency Adjustment	Electr. On/Off switch, Manual Frequency Adjustment
Frequency Adj. Range	Ch 21 - Ch 55	Ch 21 - Ch 55	Ch 21 - Ch 55
Preadj. modulation frequency	591.25 MHz (Ch 36)	591.25 MHz (Ch 36)	591.25 MHz (Ch 36)
Remote Control - type	RT111/101	RT111/101	RT111/101
Record / Playback Standard	PAL	PAL	MESECAM, PAL

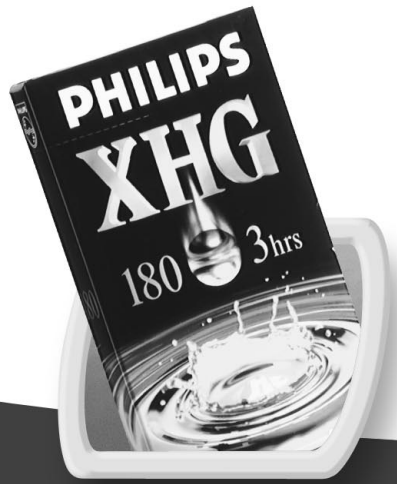

Subject to modification without notice

Show View is a Trademark of Gemstar Development Cooperation.

Let's make things better.

PHILIPS